IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s):   SALO, et al.

Serial No.:   Not yet assigned

Filed: June 29, 2001

Title: IMPROVEMENTS IN AND RELATING TO A
BROADCAST NETWORK

Group: Not yet assigned

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of   June 29, 2001
Patents and Trademarks
Washington, D.C. 20231

Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 0016240.4, filed June 30, 2000.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

Robert M. Bauer
Registration No. 34,487

RMB/alb
Attachment
(703)312-6600

This Page Blank (uspto)

INVESTOR IN PEOPLE

CERTIFIED COPY OF
PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.
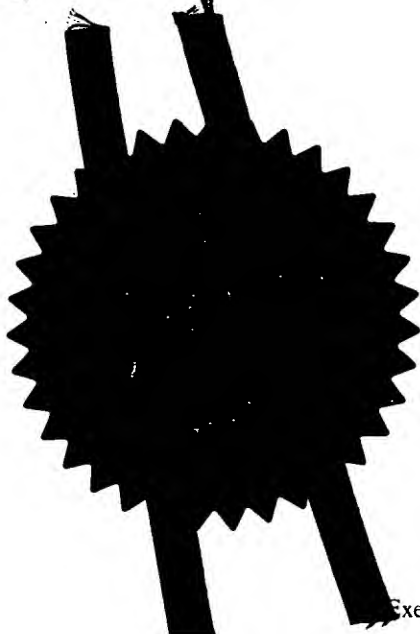
In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed _Evans_

Dated   4 June 2001

Executive Agency of the Department of Trade and Industry

This Page Blank (uspto)

The Patent Office
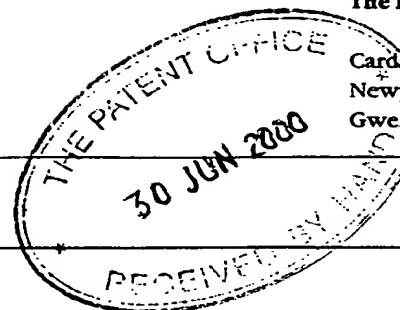
03 JUL 00 49684-17002716
P01/7700 00-0016240.4

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

30 JUN 2000

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

THE PATENT OFFICE
30 JUN 2000
RECEIVED

1.	Your reference	PAT 00104 GB

2. Patent application number
(The Patent Office will fill in this part) **0016240.4**

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

NOKIA OY
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number *(if you know it)* 750 4434002

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

IMPROVEMENTS IN AND RELATING TO A
BROADCAST NETWORK

5. Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU140NG UK

Patents ADP number *(if you know it)* 75 77638 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country	Priority application number *(if you know it)*	Date of filing *(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing *(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*
   a) *any applicant named in part 3 is not an inventor, or*
   b) *there is an inventor who is not named as an applicant, or*
   c) *any named applicant is a corporate body.*
   See note (d))

YES

9. Enter the number of sheets for any of the
   following items you are filing with this form.
   Do not count copies of the same document

Continuation sheets of this form	
Description	11
Claim(s)	3
Abstract	1
Drawing(s)	3+3 /9

10. If you are also filing any of the following,
    state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	
Any other documents (please specify)	

11.   I/We request the grant of a patent on the basis of this application.

Signature _HAWS_ (signature)   Date 29/6/00

XXXXXXXXXXXXXXX   HELEN HAWS

12. Name and daytime telephone number of
    person to contact in the United Kingdom

Ian Johnson 01252 865331

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Improvements in and relating to a broadcast network

5   The present invention relates to the delivery of content over a broadband broadcast network, particularly although not exclusively a network having hierarchical transmission modes.

Broadband broadcast networks are known in which video and audio data are
10   transmitted to a users equipped with suitable receivers. One such well known broadband network is the terrestrial Digital Video Broadcasting (DVB-T) system found in Europe and elsewhere where the video and audio data comprises a plurality of channels allowing the user to select from a range of content. It has been proposed to utilise such networks not only for the
15   transmission of video and audio data but also for the delivery of more general data types including more general data traffic.

The delivery of more general data types such as IP data differs significantly from video and audio data. In the latter case, there is not the same
20   requirement for error-free delivery of content by which, in this case, is meant the video and audio data which together forms a television broadcast. Consequently, there is no need and thus no mechanism to request re-transmission of faulty data. However, in the case of other types of content such as IP data, it is vital that packets are not lost or dropped.
25
The requirement for reliable delivery of content, particularly IP data, is all the more evident in the situation where a mobile terminal is being used to receive data. The less than optimum transmission conditions which can prevail in the case of a mobile terminal further exacerbate the difficulty of achieving reliable
30   delivery of content.

According to one aspect of the present invention, there is provided a head end device for use in a hierarchical network, the device comprising a classifier connectable to a source of content and operable to place the content into at

5 least one of a plurality of hierarchical data streams corresponding to a particular class of content.

By placing the content into an appropriate stream on the basis of its class, one then is able to optimise the transmission resources of the broadcast

10 network. As a result, the traffic load on the network can be reduced. Firstly, because the amount of data packets that are lost or dropped is reduced and secondly because there is a corresponding reduction in requests for re-transmission of those dropped or lost packets.

15 The content may be provided in the form of a data stream made up of data elements. Preferably, a splitter is connected to the output of the classifier wherein the classifier identifies the data type of each element of the stream and inserts a marker into said stream indicative of a priority assigned to the element. The splitter may then place each data element, in accordance with

20 the marker, into a corresponding hierarchical transport stream for subsequent transmission by the network.

Preferably, the device includes a connection to a look-up table. The look up table advantageously comprises a set of profiles, each of which includes at

25 least one definition of a priority for a particular data type. The choice of a particular profile is determined by the network. Thus the network may generate or allow the creation of a profile for a particular user based on the terminal type, level of service and the like. It will be recognised that the selection of content for delivery to a user may result from a push, that is at the

30 request of a party other than the recipient of the content. The push originator

might be an advertiser or other service provider for example. Otherwise, the content may be delivered to the recipient at his own request. In which case the request may be sent to the network over a return channel. The return channel might take the form of a dial-up modem connection over a public

5 switched telephone network (PSTN). Alternatively, the request may be delivered over a mobile network such as General Packet Radio Service (GPRS) or a third generation network (3G).

According to another aspect of the invention, there is provided a method of

10 transmitting content in a hierarchical network comprising classifying content received for transmission and placing the content into at least one of a plurality of hierarchical data streams corresponding to the classification of the content.

15 Again, in order to provide flexibility in the operation of the network, the method may include the establishment of a set of profiles, each of which includes at least one definition of a priority for a particular classification or data type. The selection of a particular profile is preferably under network control and may include profiles based on the type of user equipment such as a mobile

20 terminal, for example.

According to a still further aspect of the invention, there is provided a system for delivering content over a hierarchical network, comprising a source of content deliverable to a network, the network including head end equipment

25 operable to place content into at least one of a plurality of selected hierarchical data streams for transmission by a transmitter, and a terminal operable to receive the data stream, wherein the head-end equipment classifies the content and in accordance with the classification places it into a corresponding hierarchical data stream.

30

Preferably, the terminal includes a return channel. This channel, which is connected over any suitable network such as a public switched telephone network (PSTN), public land mobile network (PLMN), or the Internet permits a user of the network to select content for delivery over the hierarchical network.

5

In order to aid in understanding the present invention, a particular embodiment thereof will now be described by way of example and with reference to the accompanying drawings, in which:

10

Figure 1 is a diagrammatic view of a digital broadcast network according to an embodiment of the present invention;

Figure 2 is a constellation diagram useful in understanding the principle of hierarchical transmission;

15   Figure 3 is schematic view illustrative of the method according to the invention;

Figure 4 is a table for use in accordance with the method of Figure 3.

Referring to Figure 1, this shows a terrestrial digital video broadcast (DVB-T)
20   network 1. A user equipped with a suitable terminal 3 incorporating a receiver 5, display 7 and user interface 9, can receive data broadcast by the network 1 from a transmitter 11 forming part of the network 1. The content broadcast by the transmitter 11 is derived from a variety of sources 13,15 via gateways 17,19 and may respectively include IP and Television content.

25   Before transmission, the content received from each source 13,15 is processed in head-end equipment 21. The content, can of course, be any form of data such as text, images, audio for example. As is well known in the art, the head end equipment places the data into MPEG-based data containers. To cater for the delivery of data to a particular terminal or group of
30   terminals, the containers may also hold address information which can be

identified and read by a conditional access component in the terminal to determine whether the data is intended for that terminal. The network 1 also provides the facility for suitably equipped terminals to interact with the network. By suitably equipped terminal is meant a terminal having a return

5   channel for providing network interactivity as exemplified in the case of DVB by a number of specifications published by the Digital Video Broadcasting Office and also the European Telecommunications Standards Institute (ETSI) including the following: **DVB-NIP** Network Independent Protocols for DVB Interactive Services ETS 300 802 (V1: 11/97), Guidelines for the use of the

10   Network Independent Protocols for DVB Interactive Services TR 101 194 (V1.1.1: 06/97), **DVB-RCP** DVB interaction channel through the Public Switched Telecommunications System (PSTN) / Integrated Services Digital Network (ISDN) ETS 300 801 (V1: 08/97), **DVB-RCG** Interaction channel through the Global System for Mobile communications (GSM) EN 301 195

15   (V1.1.1 : 02/99).

Thus, a user may request the delivery of a computer file from the network to her terminal. Such interactive functionality requires a return channel 23 from

20   the terminal 3 to the DVB-T network 1 and a conditional access component in the terminal 3. The return channel 23 can be provided in the from of a dial-up connection using a modem 25 connected to the terminal 3 which establishes a connection over a telecommunications network 27 to a subscriber management system (SMS) 29 of the DVB-T network 1. The subscriber

25   management system 29 has connections to both the gateways 17,19 and the transmitter head-end equipment 21. It is thus possible for the user to issue requests for specific content via the user interface 9 of the terminal 3. The request is received by the SMS 29 which obtains the content from the relevant gateway 17,19 and passes it to the transmitter head-end for placing into data

30   containers for onward transmission. It should be noted that the request from the user might include content which is not presently being transmitted by the

network 1. To ensure that the user only receives the requested content, the data is broadcast with an identifier which the conditional access component in the terminal 3 recognises as being intended for delivery to the user. In the event that the content is received by another terminal, the conditional access

5   component of that terminal will prevent delivery of the content.

Turning to Figure 2, this illustrates the principle of hierarchical modulation which is specified as an option in the DVB-T standard, for example. In DVB-T data for transmission is placed into data containers that are encoded as an

10   MPEG-2 bit stream. This stream may then be split into two parts, a High Priority (HP) stream and a Low Priority (LP) stream, both of which are transmitted simultaneously. A bit sequence of the data which modulates the HP stream is used to select a quadrant 31 of the constellation diagram whereas for the LP stream a bit sequence of the data which modulates the

15   stream selects a particular constellation point 33. The result is that the HP stream is more robust as a receiver can more easily identify a quadrant over a particular constellation point. However, the bit rate of the HP stream will be less than that of the LP stream. Thus, the LP stream can be utilised by the receiver where the C/N ratio is such as to allow the receiver to detect not only

20   the quadrant but also a particular constellation point.

Figure 3, shows schematically how, in the present embodiment, the HP and LP streams are used to deliver content to two users each having a different type of terminal. The first user is equipped with a mobile terminal 3' and is

25   located further from the transmitter 11 than the second user who is equipped with a fixed terminal 3. The chain line marked C/N_{min} represents the maximum range from the transmitter 11 that a LP signal may extend whilst the C/N ratio remains above that necessary for its reception by a terminal.

In the situation illustrated in the Figure, each user has requested via her respective return channel 23',23 a specific item of content R_c',R_c. In this case, each user has requested a webpage made up of textual and graphical material. The request R_c',R_c from each user is received by the SMS 29 and

5   identified as being a request for Internet content. The SMS 29 then passes the request to the appropriate gateway, in this case the Internet gateway 17. This gateway 17 processes the request R_c',R_c and retrieves the requested content C,C' from the Internet. The content C'C, which, as has already been explained, is made up of textual and graphical elements is returned to the

10   SMS 29 which passes the content together with data identifying the user to a data classifier 35. The data classifier 35 identifies the elements of the content C',C by analysing the data structure e.g. by identifying the file extension of each element. Once the elements of the content C',C have been identified, the classifier 35, using the user data attached by the SMS 29, retrieves a user

15   profile (Figure 4) from the SMS 29 corresponding to the user who has made the request for the content C'.C. Using this profile, the classifier 35 is able to assign a priority to each element of the content it has identified which is then placed with the respective content. Optionally, the classifier 35 may have access to a further table 37 of priorities assigned to specific content which

20   may override or supplement those set out in the user profile (Figure 4). In this way it is possible for the classifier 35 to assign data a particular priority based on a number of criteria including, but not limited to, desired data delivery stream, receiving audience, user environment, Quality of Service (QoS), and network load. The classified content is then encrypted as an MPEG-2 data

25   stream and passed to a splitter 37. The splitter 37 detects the priority assigned to the data by the classifier and passes the corresponding content to the appropriate LP or HP stream for transmission by the transmitter 11.

The receiver of each user, depending on its prevailing C/N ratio, is then able

30   to receive either the HP stream alone or the HP and LP stream. In the Figure

the chain line C/N$_{min}$ represents the maximum range from the transmitter 11 at which the C/N ratio allow satisfactory reception of the LP stream.

In the above example, the request R$_c$' from the user of the mobile terminal for
5   a web page is acted upon as follows. The request R$_c$' reaches the SMS 29 via the return channel 23' over the PLMN/PSTN 27. The SMS 29 notes that the request R$_c$' identifies a particular user which it identifies from a subscriber list as having a mobile terminal 3'. The request R$_c$' is passed to the Internet gateway 17 which obtains the content C' and returns it to the SMS 29
10   whereupon data identifying the terminal 3' is attached before passing the content C' to the data classifier 35. The data classifier 35 obtains a user profile (A on Figure 4) from the SMS 29 corresponding to the data identifying the terminal 3'. This profile is then used to assign a priority to the elements of the content C'. In this case the content C' comprises textual elements and
15   graphical elements which are identified by the classifier by reference to their file extensions. The classifier then looks up the appropriate priority on the user profile and adds this information to the content C' which already contains data identifying the source of the request, namely the user of the mobile terminal 3'. This data is then encoded and placed into data containers before
20   being passed to the splitter 22 which identifies from the containers the priority assigned to their contents and passes them to the appropriate stream 24,26 for transmission by the transmitter 11.

The mobile terminal 3', which in this example is travelling in area relatively far
25   from the transmitter, receives the transmission. Firstly, the conditional access component of the terminal 3' identifies the transmission as being intended for it by reference to the address information added by the SMS 29. However, because of the relatively poor C/N ratio, the receiver is capable of decoding the HP stream 26 only. However, the lower bit rate of the HP stream means
30   that the terminal 3' is able to extract the textual and graphical data reliably.

Therefore, there is a reduced need to request re-transmission of dropped or lost packets over the return channel. Once the data has been extracted, the content is amalgamated by the terminal 3' and provided to the user via the display 7.

5

Turning to the user with a fixed terminal 3, the request R_c, which may be for the same or a different web page, is passed via the return channel 23 over the PLMN/PSTN 27. The SMS 29 notes that the request R_c identifies a particular user which it identifies from a subscriber list as having a fixed

10 terminal 3. The request R_c is passed to the Internet gateway 17 which obtains the content C and returns it to the SMS 29 whereupon data identifying the terminal 3 is attached before passing the content C to the data classifier 35. The data classifier 35 obtains a user profile (B on Figure 4) from the SMS 29 corresponding to the data identifying the terminal 3. This profile is then

15 used to assign a priority to the elements of the content C. In this case the content C comprises textual elements and graphical elements which are identified by the classifier by reference to their file extensions. The classifier 35 then looks up the appropriate priority on the user profile and adds this information to the content C which already contains data identifying the

20 source of the request, namely the user of the mobile terminal 3. This data is then encoded and placed into data containers before being passed to the splitter 22 which identifies from the containers the priority assigned to their contents and passes them to the appropriate stream 24,26 for transmission by the transmitter 11.

25

The fixed user, who in this example is located relatively close to the transmitter, receives the transmission and through the conditional access mechanism identifies the transmission as being directed to it. Because of the good C/N ratio, the receiver is capable of decoding both HP and LP streams.

30 Thus, the terminal is able to extract the textual and graphical data reliably at a

faster overall rate than that achieved by the mobile user. As described above in relation to the mobile terminal 3', the content is provided to the user on the display 7.

5   It will be recognised from the above that the ability to define the stream on which data is to be transmitted in a flexible and dynamic manner allows the network to be used to deliver data to users in a manner which maximise network resources. In the above examples, the user profile A set up for the user of the mobile terminal 3' assigns the High Priority stream to text,

10   graphics, data file and email content but not to video content. In practice, this means that the user of the mobile terminal can only receive video content when the C/N ratio is good enough to permit reception of the Low Priority Stream. Although video content could be placed in the High Priority Stream the lower bit rate might not meet the users requirements in terms of cost and

15   speed.

Turning to the user profile B this places the text and email content into the High Priority Stream and the graphics, data file and video in to the Low Priority Stream. Such a configuration ensures particularly reliable delivery of

20   text and email content whilst allowing the fastest possible transfer of the other content.

Other user profiles could be set up to suit the preferences of the user and/or the network. Indeed a facility could be provided to define an overriding set of

25   priorities which could be employed at times of high network load, for example. Indeed, further more complex approaches to data classification for transmission on different streams are possible. Thus an operator of the network can set an interservice categorisation that places a complete service into a particular or indeed both streams, whilst a intraservice categorisation

30   may be defined that allows critical data to be placed in the HP stream and

non-critical data in the LP stream. The particular classification scheme used by the network operator may be driven by a number of factors including financial in the sense that an operator might offer those users prepared to pay for the facility the option of more reliable delivery and/or at faster rates in
5   different circumstances e.g. time of the week/day.

It will be further appreciated that although the above examples refer to the presence of a return channel to assist in the selection of content, the process of data classification according to a preferred priority stream can be applied to
10   any data which is intended to be transmitted by the network as a broadcast, multicast, or unicast, irrespective of whether the content has been requested by the user or not. Furthermore, although the above embodiment relates to DVB-T, the invention is, of course, applicable to any hierarchical network, in which the transmission capability exists on two or more levels which are
15   ranked in accordance with a particular feature/criterion or perhaps features/criteria. Such a network might have a hierarchy based on one or more of the following attributes namely quality of service, delivery speed, error rate and such like.

Claims:

1. A head end device for use in a hierarchical network, the device comprising a classifier connectable to a source of content and operable
5 to place the content into at least one of a plurality of hierarchical data streams corresponding to a particular class of content.

2. A device as claimed in Claim 1, wherein the classification of content is made in accordance with its data type.
10

3. A device as claimed in Claim 2, wherein the classifier is connectable to a data stream of content in the form of data elements and a splitter connected to the output of the classifier wherein the classifier identifies the data type of each element of the stream and inserts a marker into
15 said stream indicative of a priority assigned to the element such that splitter subsequently places each data element, in accordance with the marker, into a corresponding hierarchical transport stream for subsequent transmission by the network.

20 4. A device as claimed in Claim 2 or Claim 3, further including a connection to a look-up table accessible in use by said classifier, the table comprising a set of profiles, each of which includes at least one definition of a priority for a particular data type wherein the selection by the classifier of a particular profile for identifying the data type of each
25 element is determined by the network.

5. A method of transmitting content in a hierarchical network comprising classifying content received for transmission and placing the content into at least one of a plurality of hierarchical data streams
30 corresponding to the classification of the content.

6.   A method as claimed in Claim 5, including defining a data stream for a particular classification.

5

7.   A method as claimed in Claim 6, including establishing a set of profiles, each of which includes at least one definition of a data stream for a particular classification wherein the selection of a particular profile is determined by the network.

10

8.   A method as claimed in Claim 7, wherein the network determines the selection of a profile on the basis of an intended recipient of the content.

15   9.   A method as claimed in Claim 7, wherein the network determines the selection of a profile on the basis of a service providing said content.

10.   A method as claimed in Claim 7, wherein the network determines the selection of a profile on the basis of network load.

20

11.   A method as claimed in any one of Claims 7 to 10, wherein the network is a terrestrial digital video broadcast network (DVB-T).

12.   A system for delivering content over a hierarchical network, comprising
25   a source of content deliverable, to a network, the network including head end equipment operable to place content into at least one of a plurality of selected hierarchical data streams for transmission by a transmitter, and a terminal operable to receive the data stream, wherein the head-end equipment classifies the content and in

accordance with the classification places it into a corresponding hierarchical data stream.

13. A system as claimed in Clam 12, wherein the terminal provides a return channel connectable, in use, to the network, such that a request for the delivery of content may be originated by the terminal.

Abstract

Improvements in and relating to a broadcast network

A digital broadcast network (1) operating in a hierarchical mode is described.
5   The network (1) includes means (35) for classifying the data types making up the content to be broadcast.   In accordance with the classification, the network (1) transmits the data types in an appropriate mode.   In addition, there is described a method of defining a set of profiles in accordance with which content of a particular data type is assigned to a particular mode for
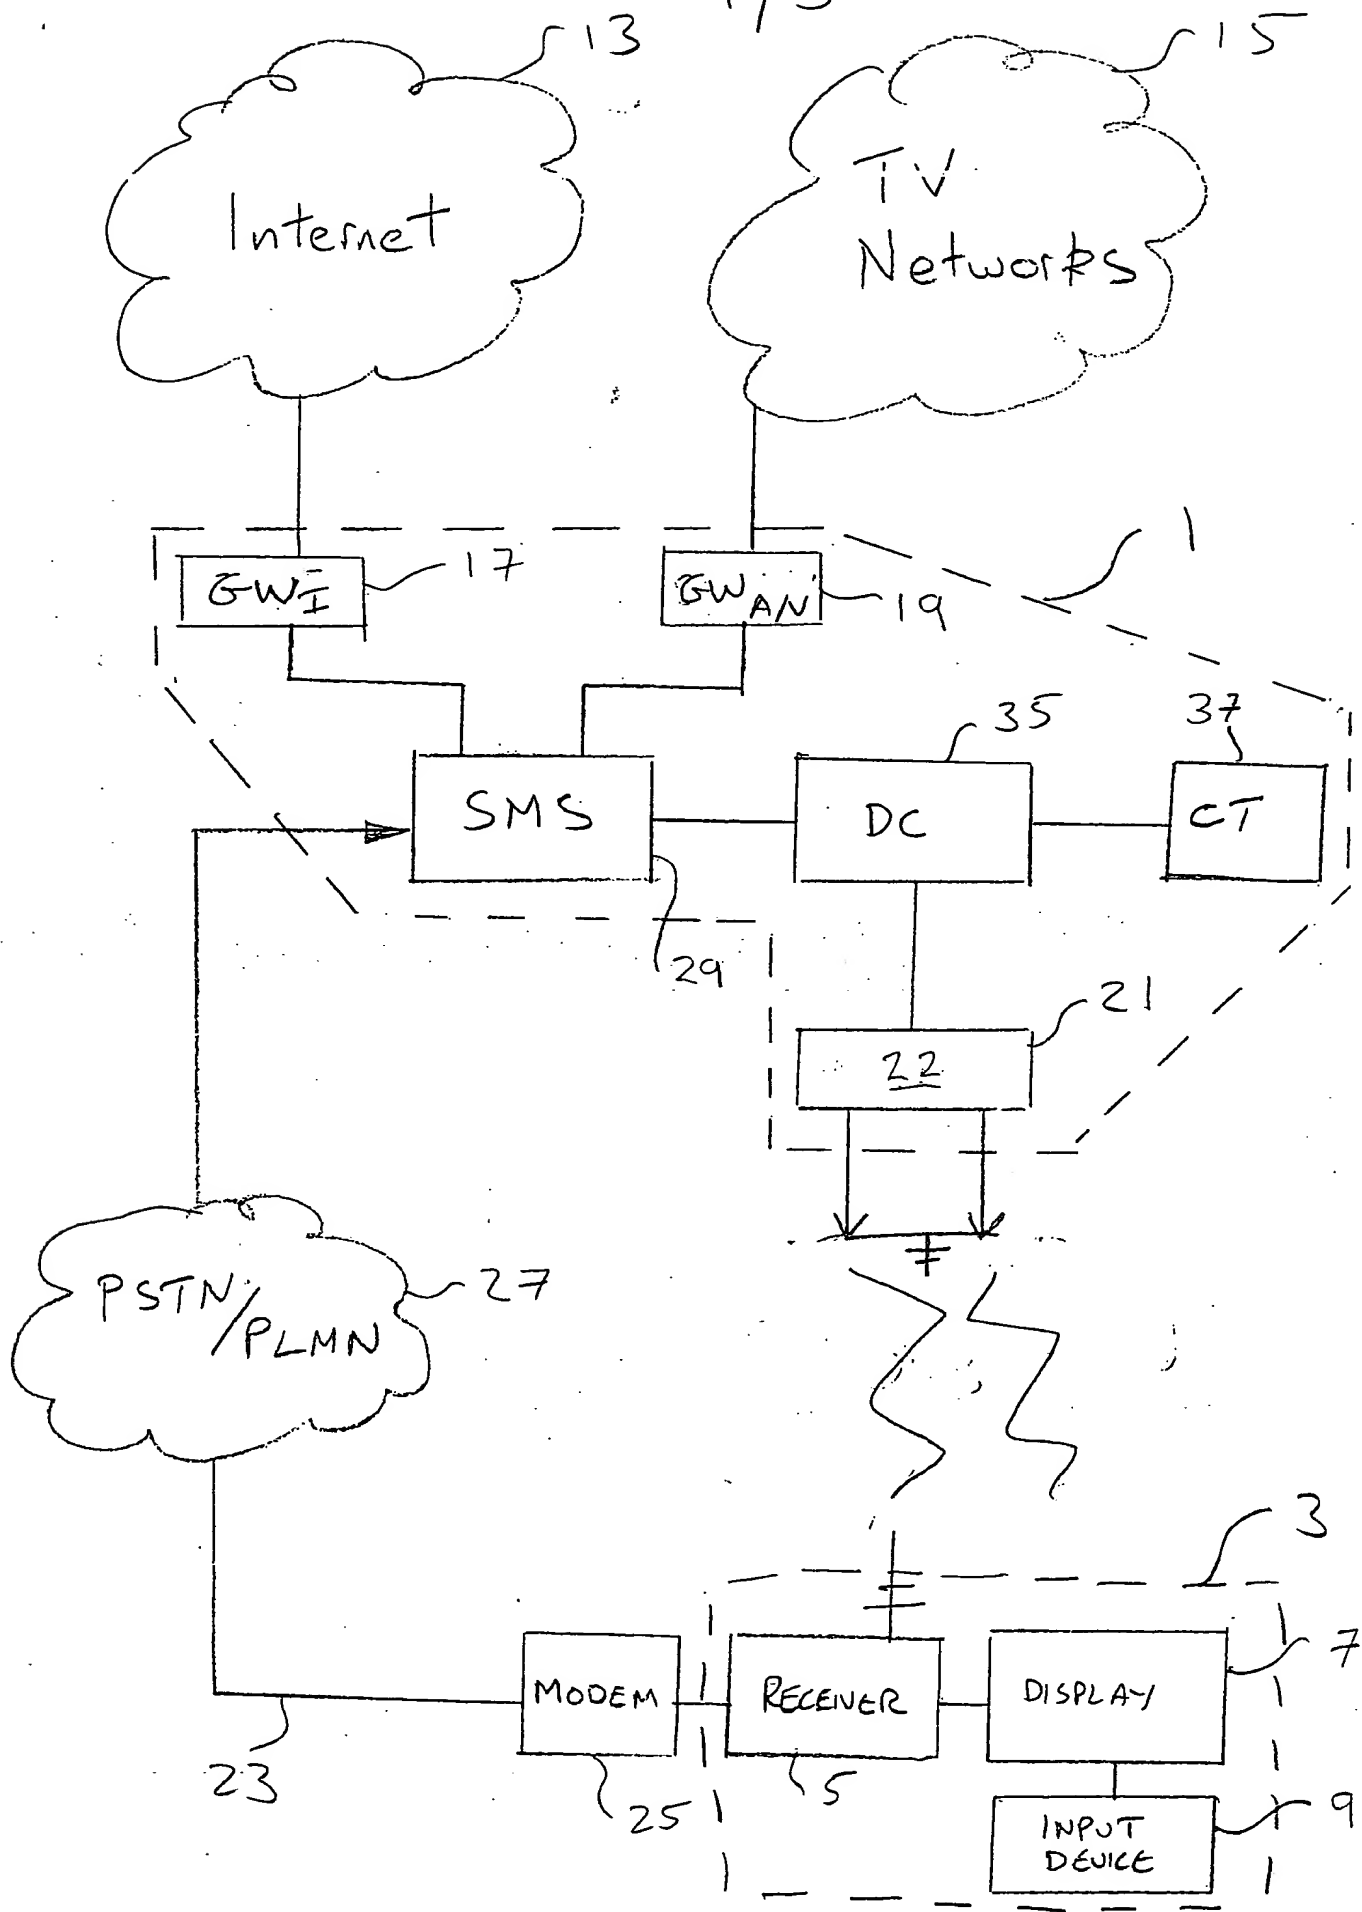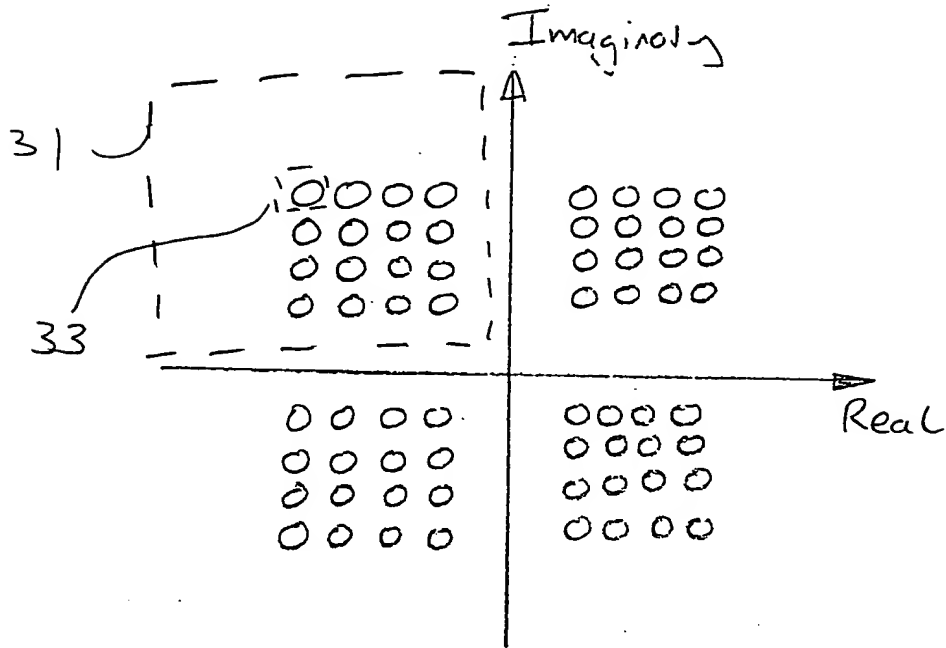10   transmission.

Figure 1

This Page Blank (uspto)

Figure 2

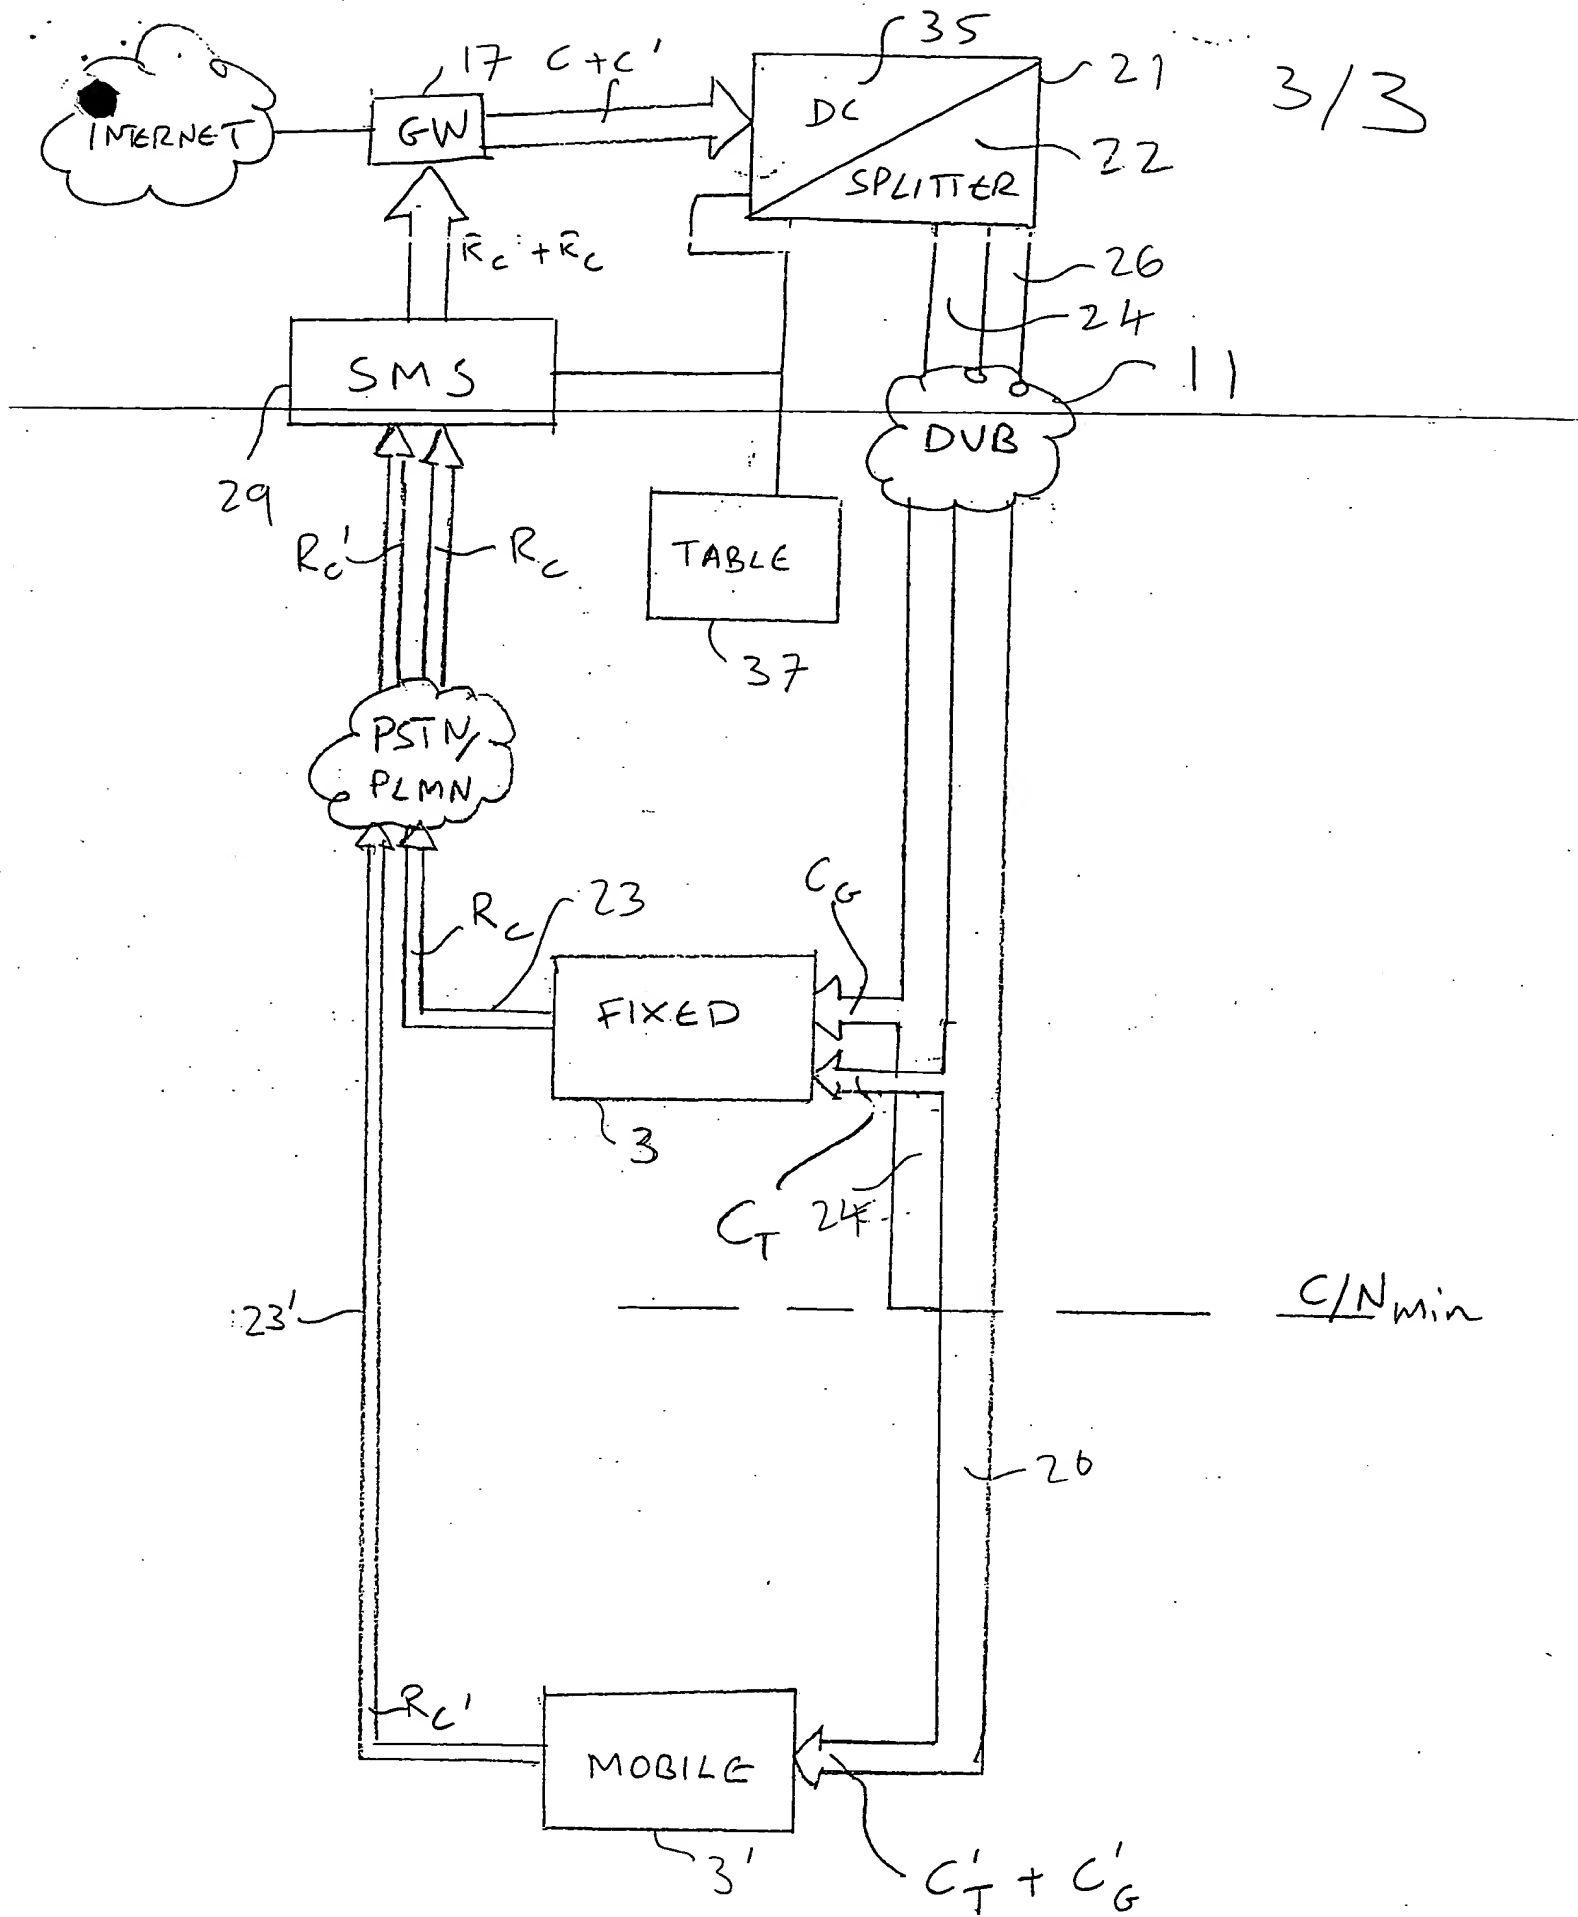| DATA TYPE	TERMINAL TYPE	
	MOBILE	FIXED
TEXT	HP	HP
GRAPHICS	HP	LP
DATA FILE	HP	LP ⌐ B
EMAIL	HP	HP
VIDEO	LP	LP

A

Figure 4

This Page Blank (uspto)

Figure 3

JAPAN

This Page Blank (uspto)